

PP Straps and Injection Molded Packaging Products



Together we Innovate™


Pick The Right Strap

Tell us what you need

Our Sales and Technical experts are available to help you to choose the right strapping product. We also test straps, evaluate strapping needs and make recommendations to our valued customers.

Consistent quality and performance of EDAMA products are achieved through the use of appropriately characterized raw materials and well controlled manufacturing processes. We ensure superior quality of our products.

Polypropylene Straps are lightweight, versatile, easy to use and cover wide range of applications. They are recyclable strapping solution and support sustainability.

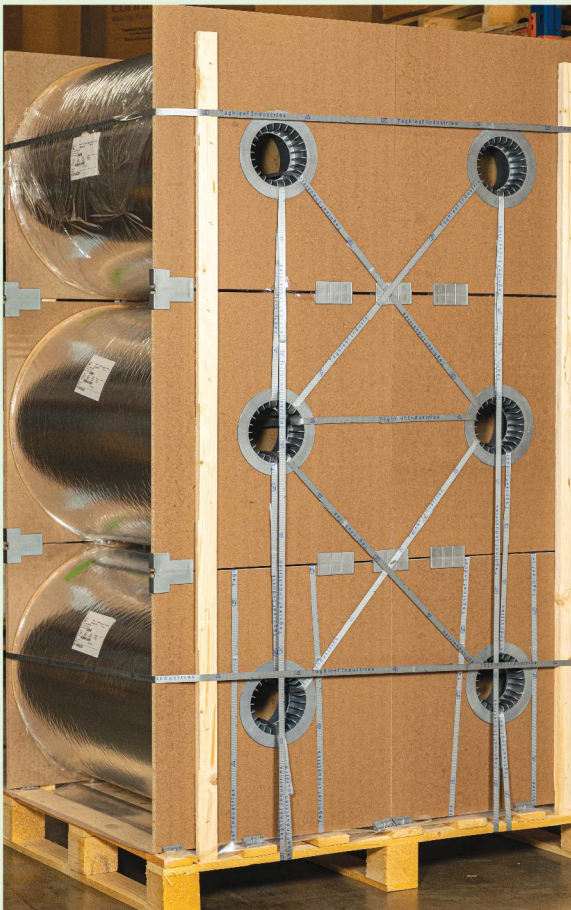



**A Brand of
Taghleef Industries
for PP Straps & Injection
Molded Products**

HEAVY DUTY PP STRAP

Dimension: (Width X Thickness)	15mm X 0.90mm (0.59" X 0.035")		
Item description	EDM PPM 6-1000-1590/ EDM PPW 6-1000-1590	EDM PPM 8-1000-1590/ EDM PPW 8-1000-1590	EDM PPM 16-1200-1590/ EDM PPW 16-1200-1590
Color	Metallic Grey/White	Metallic Grey/White	Metallic Grey/White
Core diameter (ID)	152 mm (6")	203 mm (8")	406 mm (16")
Reel Width	190 mm (7.5")	190 mm (7.5")	160 mm (6.3")
Reel outer diameter (Approx)	350 mm (13.8")	380 mm (15")	550 mm (21.7")
Length / Reel	1000 meter (3280 ft)	1000 meter (3280 ft)	1200 meter (3940 ft)
Weight / Reel (Approx)	10 Kg (22 lb)	10 Kg (22 lb)	11.8 Kg (26 lb)
Packing	90 Reels/Pallet	90 Reels/Pallet	48 Reels/Pallet
Average Gross weight/ Pallet	920 Kg (2028 lb)	920 Kg (2028 lb)	586 Kg (1292 lb)
Pallet Size (L X W X H)	1100 mm(43.3") X 1100 mm (43.3") X 2100 mm (82.7")		
Breaking Strength ASTM D 3950 - 04	~ 300 Kg F (660 lb F/ 2940 N)		
Elongation percentage @ Peak	~ 15 - 20 %		
Surface type	Embossed		

MEDIUM DUTY PP STRAPS

Dimension: (Width X Thickness)	12mm X 0.65mm (0.47" X 0.026")		
Item description	EDM PPM 6-1850-1265/ EDM PPW 6-1850-1265	EDM PPM 8-1850-1265/ EDM PPW 8-1850-1265	EDM PPM 16-2200-1265/ EDM PPW 16-2200-1265
Color	Metallic Grey/White	Metallic Grey/White	Metallic Grey/White
Core diameter (ID)	152 mm (6")	203 mm (8")	406 mm (16")
Reel Width	190 mm (7.5")	190 mm (7.5")	160 mm (6.3")
Reel outer diameter (Approx)	350 mm (13.8")	380 mm (15")	550 mm (21.7")
Length / Reel	1850 meter (6070 ft)	1850 meter (6070 ft)	2200 meter (7220 ft)
Weight / Reel (Approx)	10 Kg (22 lb)	10 Kg (22 lb)	11.8 Kg (26 lb)
Packing	90 Reels/Pallet	90 Reels/Pallet	48 Reels/Pallet
Average Gross weight/ Pallet	920 Kg (2028 lb)	920 Kg (2028 lb)	586 Kg (1292 lb)
Pallet Size (L X W X H)	1100 mm(43.3") X 1100 mm (43.3") X 2100 mm (82.7")		
Breaking Strength ASTM D 3950 - 04	~ 170 Kg F (375 lb F/ 1667 N)		
Elongation percentage @ Peak	~ 15 - 20 %		
Surface type	Embossed		



LIGHT DUTY PP STRAPS

Dimension: (Width X Thickness)	9mm X 0.60mm (0.35" X 0.024")		
Item description	EDM PPM 6-2850-0960/ EDM PPW 6-2850-0960	EDM PPM 8-2850-0960/ EDM PPW 8-2850-0960	EDM PPM 16-3400-0960/ EDM PPW 16-3400-0960
Color	Metallic Grey/White	Metallic Grey/White	Metallic Grey/White
Core diameter (ID)	152 mm (6")	203 mm (8")	406 mm (16")
Reel Width	190 mm (7.5")	190 mm (7.5")	160 mm (6.3")
Reel outer diameter (Approx)	350 mm (13.8")	380 mm (15")	550 mm (21.7")
Length / Reel	2850 meter (9350 ft)	2850 meter (9350 ft)	3400 meter (11150 ft)
Weight / Reel (Approx)	10 Kg (22 lb)	10 Kg (22 lb)	11.8 Kg (26 lb)
Packing	90 Reels/Pallet	90 Reels/Pallet	48 Reels/Pallet
Average Gross weight/ Pallet	920 Kg (2028 lb)	920 Kg (2028 lb)	586 Kg (1292 lb)
Pallet Size (L X W X H)	1100 mm(43.3") X 1100 mm (43.3") X 2100 mm (82.7")		
Breaking Strength ASTM D 3950 - 04	~ 100 Kg F (220 lb F/ 980 N)		
Elongation percentage @ Peak	~ 15 - 20 %		
Surface type	Embossed		

White Strap 15 MM (Printed)

Gray Strap 15 MM (Printed)

White Strap 12 MM (Unprinted)

Gray Strap 12 MM (Unprinted)

White Strap 9 MM (Unprinted)

Gray Strap 9 MM (Unprinted)



Customized Printed Straps

15mm Straps could be provided with customer's name, logo etc. printed on it as per customer's request. Printed straps help to brand every package, provide additional security against counterfeit and tampering. It is also a soft advertisement for the company, apart from providing an elegant look to the strapped package.

EDAMA Straps are also suitable for automatic and semi-automatic packaging machines apart from manual strapping.


Benefits:

SECURITY

ADVERTISING


DISTRIBUTION

QUALITY CONTROL

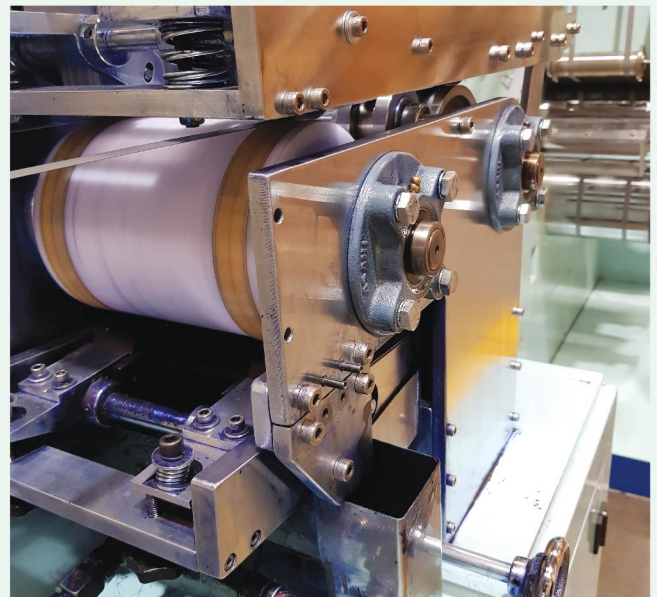

Testometric System for Quality Assurance

Measurement of breaking strengths & elongation at break are part of our regular process control.

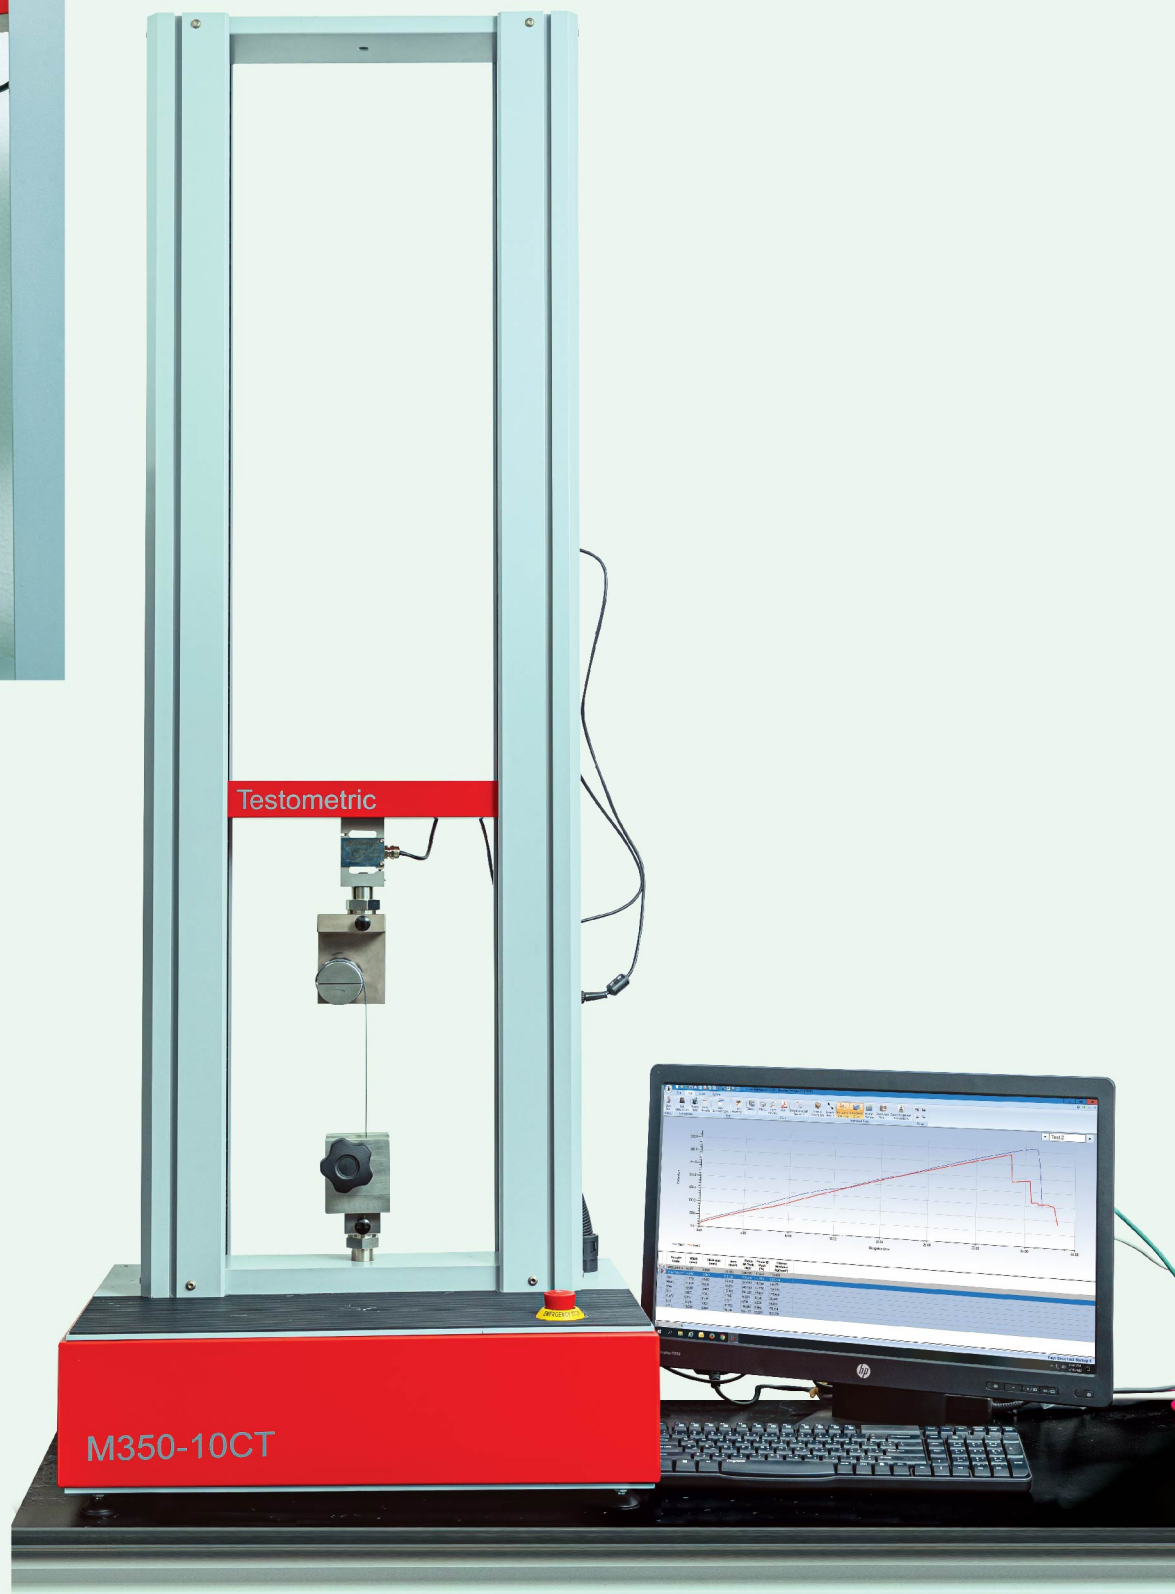



EDAMA is a brand of Taghleef Industries (*Ti*) and is a part of *Ti*'s Sustainable solutions. Certified first quality PIR (Post Industrially Recycled) resins are used to manufacture **EDAMA** products in its latest and advanced production machines. To cover diverse strapping needs - light, medium and heavy duty applications, **EDAMA** make PP straps of 9, 12 & 15mm width and wound up on 6", 8" & 16" paper cores. Breaking Strength & Elongation at Break are monitored precisely to ensure consistent product quality. For the purpose branding & product security, **EDAMA** also provide printed straps mainly to the corporate clients. **EDAMA** is located in Dubai, U.A.E.



Dubai, P.O. Box 56391 - Jebel Ali Industrial Area 1
Phone: +971 4 880 1100, Fax: +971 4 880 1122
staff.mea@ti-films.com, www.ti-films.com